


Digital Signage

SHARP/ NEC MULTISYNC M751 AIRSERVER

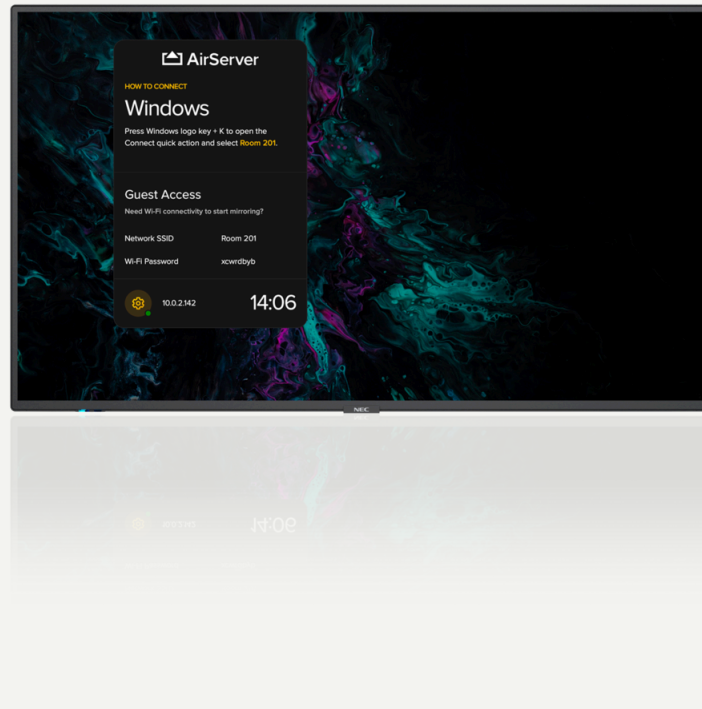

MultiSync AirServer-modellene er perfekte for møterom og møteplasser, og gir en elegant kombinasjon av intuitiv skjermdeling med profesjonell skjermt teknologi, som støtter uanstrengt samarbeid.

- Uhindret lesbarhet – ingen refleksjoner fra vinduer eller andre lyskilder betyr ingen forstyrrelse av synligheten av skiltinnhold eller møteroms presentasjon.
- Forbedret bildeytelse – avanserte innstillinger av visuelle parametere gir full kontroll over lysstyrke, farge, gamma og ensartethet via SpectraView Engine for presise, naturlige bilder.
- Sikker fjernadministrasjon – kontroller enhetene dine eksternt og sikkert ved å bruke NEC NaviSet Administrator 2; administrere vedlikeholds krav proaktivt og spare tid og ressurser.
- Oppdragskritisk 24/7 klar drift – utvalget av industrielle komponenter og nøye design fokusert på krevende bruksscenarier følger med en imponerende og kontinuerlig seeropplevelse.
- Future Ready Connectivity – med flere industristandard digitale og analoge signalinnganger for fleksibel integrering i AV-infrastrukturer.

Spesifikasjoner

Tilbehør

[AVSpecificationAccessories]	[remote-control-transmitter], [installation-set-up-manual], [power-cord], [hdmi-cable], [mounting-bracket], [tabletop-stand], [trolley-stand], [battery]
Shipping Content	[2-x-aaa-batteries], [display], [hdmi-cable], [power-cable], [remote-control], [setup-manual]

[AVSpecificationSpecialCharacteristics]	[dicom-simulation], [hdmi-arc], [powered-usb-port-10-w], [removable-logo]
[AVSpecification2470OperationCertified]	True
[AVSpecificationLimitedManufacturersWarrantyYrs]	3
[AVSpecificationLocalDimming]	True
[AVSpecificationBuiltInSpeakersW]	10 + 10
[AVSpecificationPowerManagement]	True
[AVSpecificationCabinetColour]	[black]
[AVSpecificationTempSensor]	True
[AVSpecificationBrightnessSensor]	True
[AVSpecificationPictureInPictureMode]	True
[AVSpecificationPictureByPictureMode]	True
[AVSpecificationSchedulerTimer]	True
[AVSpecificationRemoteManagement]	True
[AVSpecificationGainControl]	True
[AVSpecificationEMailNotification]	True
SNMP	True

[AVSpecificationOperatingVoltageAcV]	100-240
[AVSpecificationFreqHz]	50-60
[AVSpecificationPowerConsumptionWOperatingMax]	205
[AVSpecificationOperatingTempC]	0 - 40
[AVSpecificationStorageTempC]	-20 - 60
[AVSpecificationStorageHumidityMin]	10
[AVSpecificationStorageHumidityMax]	80

[AVSpecificationLandscape]	True
[AVSpecificationPortrait]	True
[AVSpecificationMountingVesaMm]	600 x 400 (FDMI)
[AVSpecificationMountingNumberOfPointsPitch]	4
[AVSpecificationMountingScrewSpecificationSizeMaxLength]M8	

[AVSpecificationConnectivityOutputDisplayport]	1
HDMI	1
[AVSpecificationConnectivityOutputAudio35MmJack]1	

Rammestørrelse (V/H) mm	14
Rammestørrelse (Ø) mm	14
Rammestørrelse (N) mm	15

Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80

Haze Level [%]	Pro 25
----------------	--------

AirServer Embedded Screen Mirroring Solution

[AVSpecificationMiracast]	[android-and-windows], [extend-windows-10-desktop], [miracast-over-infrastructure], [screen-mirroring], [touchback-and-pen-support]
Airplay	[code-and-password], [extend-macos-display], [ios], [ipados-and-macos], [screen-mirroring-and-content-sharing]
Google Cast	[android], [chrome-os-and-google-chrome], [prompt-security], [screen-mirroring-and-cast-from-apps-with-drm]
Guest Connectivity	2.4 and 5 GHz channel selection, access control (device only, Internet only or Internet/LAN), Wi-Fi Hotspot, WPA2 security
Video Output	[up-to-full-hd-1920-x-1080-at-60-fps]
No. of Connections	1
Networking	1 x Gigabit LAN, 802.11 ac/b/g/n Wi-Fi, 802.1X security, IPv6 addresses, Proxy
Automatic Updates	[provides-new-features-and-security-enhancements]

[AVSpecificationPanelTechnology]	IPS with Direct LED backlights
[AVSpecificationNativeResPixels]	3840 x 2160
[AVSpecificationAspectRatio]	16:9
[AVSpecificationBacklightTechnology]	Direct LED
[AVSpecificationBrightnessCdM]	500
[AVSpecificationContrastRatio]	8000:1
[AVSpecificationResponseTimeGreyToGreyAvgMs]	8
[AVSpecificationViewingAngle]	178
[AVSpecificationColourDepthBn]	1073 (10bit)

[AVSpecificationShippingCartonDimensionsWidthMm]	1830
[AVSpecificationShippingCartonDimensionsHeightMm]1070	
[AVSpecificationShippingCartonDimensionsDepthMm]	225
[AVSpecificationProductWeightWithoutStandKg]	38
[AVSpecificationShippingWeightKg]	52

[AVSpecificationConnectivityInputDisplayport]	2
HDMI	2
[AVSpecificationConnectivityInputAudio35MmJack]1	

RS232C INN	1
[AVSpecificationLanPort]	1
USB	3

[AVSpecificationScreenSizeInch]	75
[AVSpecificationScreenSizeCm]	189

[AVSpecificationEnergyStar]	True
-----------------------------	------

