


PN-HB851

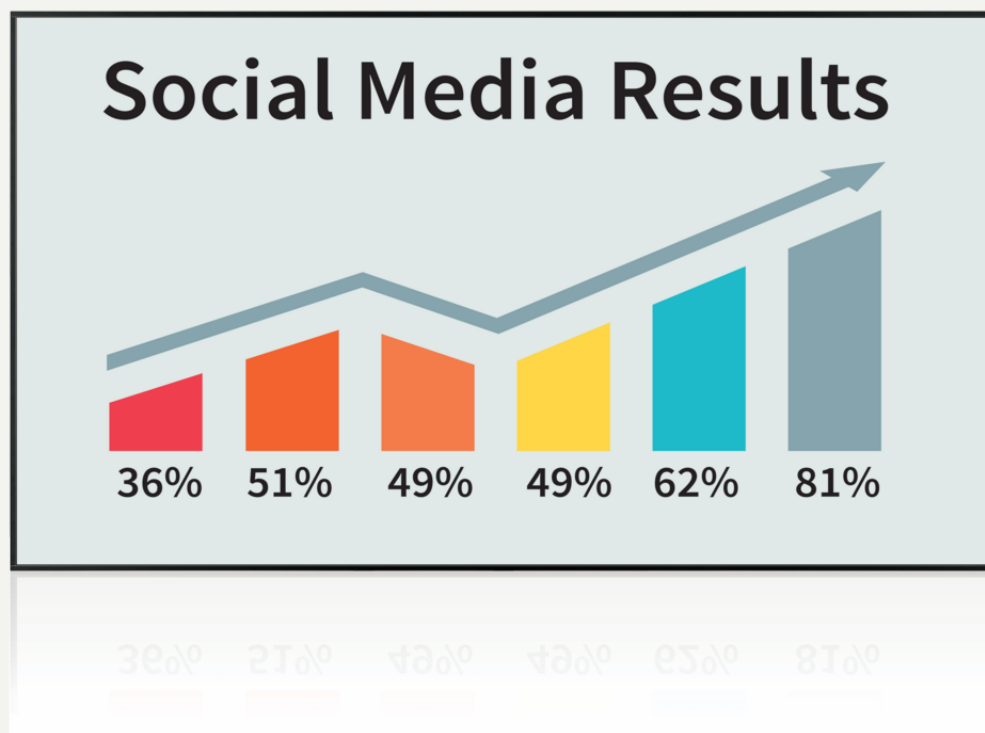

- 85 (215,9 cm) display for professional 16/7 signage
- 3840 x 2160 pixels with 350cd/m2
- Powerful and flexible stand-alone operation with embedded Android 7.1 SoC
- Flexible performance upgrade with Mini-OPS extension slot
- Portrait, Landscape and Face-Down Installation Support
- Slim Bezel Design with Speakers 10W + 10W
- SHARP E-Signage S Player Pre-Installed on Android SoC
- Quad Screen Mode, Auto Input, Priority Input, Start Input Mode
- Multi Screen Mode: 5x5
- P in P and P by P Mode
- CEC Support for HDMI
- Wakeup via HDMI, RS232 and LAN

Spesifikasjoner

Tilbehør

[AVSpecificationAccessories]	Fjernkontrollstransmitter, Driftsmanual, Installasjon oppsettmanual, CD Rom, Strømledning, Batteri, Kabelklemme, Etikett for skjuling av merkenavn, WiFi-Antenna
------------------------------	--

[AVSpecificationLimitedManufacturersWarrantyYrs]	3
[AVSpecificationBuiltInSpeakersW]	10 + 10
[AVSpecificationComputerInputPlugAndPlay]	Ja
[AVSpecificationPowerManagement]	Ja
[AVSpecificationOptionSlotInterface]	Ja
[AVSpecificationCabinetColour]	Black
[AVSpecificationInstallationHandles]	Ja
[AVSpecificationFanless]	Ja
[AVSpecificationResidualImageReductionFeature]	Ja
[AVSpecificationPictureInPictureMode]	Ja
[AVSpecificationPictureByPictureMode]	Ja
[AVSpecificationMultiScreenFunctionVideowallModeEnlargeFeature]	Ja
[AVSpecificationBezelCorrectionFeature]	Ja
[AVSpecificationReverseImageFeature]	Ja
[AVSpecificationMultiLanguageOsd]	Ja
[AVSpecificationSchedulerTimer]	Ja
[AVSpecificationRemoteManagement]	Ja
[AVSpecificationDaisyChainMirrorMode]	Ja
[AVSpecificationAdjustmentLockFeature]	Ja
[AVSpecificationAutoInputChange]	Ja
[AVSpecificationScreenAdjustment]	Ja
[AVSpecificationColourTempAdjustment]	Ja
[AVSpecificationGammaAdjustment]	Ja
[AVSpecificationSelfAdjust]	Ja
[AVSpecificationManualImageSizeAdjustment]	Ja
[AVSpecificationMonitorControlSoftwareSupport]	Ja
[AVSpecificationRs232CCommunicationSpeedChange]	Ja
[AVSpecificationAudioSelectionPerImageInput]	Ja

[AVSpecificationConnectivityOutputDisplayport]	1
[AVSpecificationConnectivityOutputAudio35MmJack]	1

RS232C INN	1
RS232C UT	1
[AVSpecificationLanPort]	1
USB	3

Display

[AVSpecificationScreenSizeInch]	85
[AVSpecificationScreenSizeCm]	216

Mekanisk

Rammestørrelse (V/H) mm	11
Rammestørrelse (Ø) mm	13
Rammestørrelse (N) mm	11

[AVSpecificationPanelTechnology]	TFT-LCD
[AVSpecificationNativeResPixels]	3840 x 2160
[AVSpecificationAspectRatio]	16:9
[AVSpecificationScreenFilter]	AG
[AVSpecificationBacklightTechnology]	Direct LED
[AVSpecificationBrightnessCdM]	350
[AVSpecificationContrastRatio]	5000:1
[AVSpecificationDisplayColoursMillions]	1064.64
[AVSpecificationResponseTimeGreyToGreyAvgMs]	10
[AVSpecificationPixelPitchMm]	0,488
[AVSpecificationViewingAngle]	178
[AVSpecificationActiveScreenAreaHVMm]	1872 x 1053

[AVSpecificationOperatingVoltageAcv]	100-240
[AVSpecificationFreqHz]	50-60
[AVSpecificationPowerConsumptionWOperatingMax]	370
[AVSpecificationOperatingTempC]	0 to 40

[AVSpecificationCeCbReport]	Ja
-----------------------------	----

[AVSpecificationShippingCartonDimensionsWidthMm]	2078
[AVSpecificationShippingCartonDimensionsHeightMm]	1251
[AVSpecificationShippingCartonDimensionsDepthMm]	308
[AVSpecificationProductWeightWithoutStandKg]	45
[AVSpecificationShippingWeightKg]	58

[AVSpecificationConnectivityInputDisplayport]	1
HDMI	2
[AVSpecificationConnectivityInputAudio35MmJack]	1
VGA	1

[AVSpecificationLandscape]	Ja
[AVSpecificationPortrait]	Ja
[AVSpecificationHorizontal]	Ja
[AVSpecificationMountingVesaMm]	600 x 400
[AVSpecificationMountingNumberOfPointsPitch]	4
[AVSpecificationMountingScrewSpecificationSizeMaxLength]	M6

WLAN	Ja
[AVSpecificationConnectivityBluetooth]	Ja

Miljøforhold

Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80

