


Videovegg

NEC MULTISYNC UN552

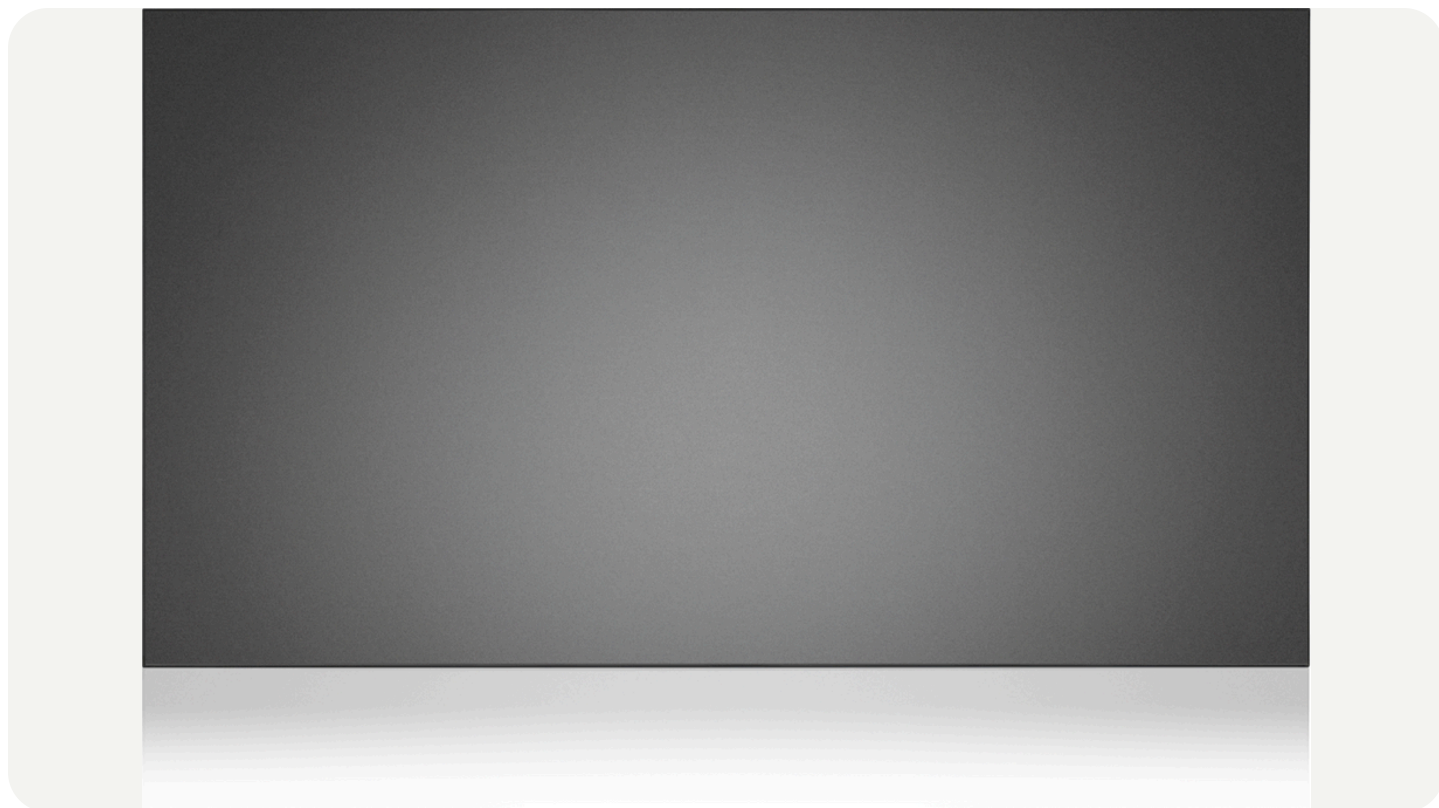

Videovegger du kan stole på.

- Enkel installering – sett uanstrengt opp veggskjermen med Auto TileMatrix og kalibrering rett ut av esken. Spar tid ved å koble til bruksklare forhåndsinnstillinger for forhåndsdefinerte bruksscenarie
- Forbedret bildeytelse – avanserte innstillinger av relevante visuelle parametere gir tilgang til full kontroll over lysstyrke, farge, gamma og ensartethet via SpectraView Engine for presise, naturlige
- Sikker pålitelighet og lang levetid for videovegger – unikt varmehåndteringssystem fra NEC gjør det mulig for brukeren å overvåke og styre varmen inne i skjermen.
- Smart medieintegrering – integrer mediekilden du vil bruke, i videoveggen. Utnytt det store utvalget av NECs dokking-PC-er og Raspberry Pi databehandlingsmoduler.
- Levende og konsekvente farger – forvent fargegjengivelse som føles naturlig, med IPS panelteknologi. S-IPS-panelet sikrer at perfekt synlighet opprettholdes også ved ekstreme visningsvinkler.

Spesifikasjoner

Tilbehør

[AVSpecificationAccessories]	[remote-control-transmitter], [installation-set-up-manual], [power-cord], [hdmi-cable], [displayport-cable], [mounting- bracket], [tabletop-stand]
Shipping Content	[display], [displayport-cable], [hdmi-cable], [lan-cable-rj45], [power-cable]

[AVSpecificationPanelTechnology]	S-IPS with Direct LED backlights
[AVSpecificationNativeResPixels]	1920 x 1080
[AVSpecificationAspectRatio]	16:9
[AVSpecificationBacklightTechnology]	Direct LED
[AVSpecificationBrightnessCdM]	700
[AVSpecificationContrastRatio]	1700:1
[AVSpecificationResponseTimeGreyToGreyAvgMs]	8
[AVSpecificationPixelPitchMm]	0,63
[AVSpecificationViewingAngle]	178
[AVSpecificationActiveScreenAreaHVMm]	1209.63 x 680.34

[AVSpecificationPowerConsumptionWOperatingMax]	380
[AVSpecificationOperatingTempC]	0 - 40
[AVSpecificationStorageTempC]	-20 - 60
[AVSpecificationStorageHumidityMin]	10
[AVSpecificationStorageHumidityMax]	90

[AVSpecificationConnectivityOutputDisplayport]	1
HDMI	1
[AVSpecificationConnectivityOutputAudio35MmJack]	1

[AVSpecificationColourVersions]	[black-front-bezel], [black-back- cabinet]
---------------------------------	---

[AVSpecificationScreenSizeInch]	55
[AVSpecificationScreenSizeCm]	139

[AVSpecificationEnergyStar]	True
-----------------------------	------

Haze Level [%]	28
----------------	----

[AVSpecificationSpecialCharacteristics]	[auto-id-assignment], [auto-tiling- function], [automatic-alarm-e- mails], [dicom-simulation], [frame- comp], [http-server], [image-flip], [intelligent-wireless-data-based- on-nfc], [naviset-administrator-2], [p]link-support], [tilematrix], [usb- media-player], [user-input- priority-definition], [user- readable-log-function]
[AVSpecification247OperationCertified]	True
[AVSpecificationLimitedManufacturersWarrantyYrs]	3
[AVSpecificationComputerInputPlugAndPlay]	True
[AVSpecificationOptionSlotInterface]	True
[AVSpecificationEquipmentSpaceMounting]	True
[AVSpecificationCabinetColour]	[black]
[AVSpecificationTempSensor]	True

[AVSpecificationConnectivityInputComposite]	1
[AVSpecificationConnectivityInputDisplayport]	2
DVI-D	1
HDMI	2
[AVSpecificationConnectivityInputAudio35MmJack]	2
VGA	1

[AVSpecificationLandscape]	True
[AVSpecificationPortrait]	True
[AVSpecificationMountingVesaMm]	400 x 400 (FDMI)
[AVSpecificationMountingNumberOfPointsPitch]	4
[AVSpecificationMountingScrewSpecificationSizeMaxLength]M6	

RS232C INN	1
[AVSpecificationLanPort]	2
USB	5

Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80

[AVSpecificationProductWeightWithoutStandKg]	26
--	----

