


Digital Signage

SHARP/ NEC MULTISYNC M431 AIRSERVER

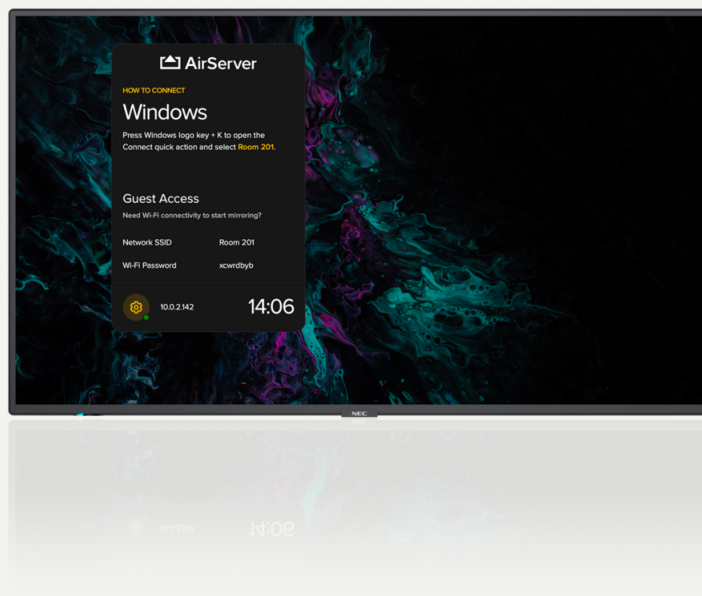

MultiSync AirServer-modellene er perfekte for møterom og møteplasser, og gir en elegant kombinasjon av intuitiv skjermdeling med profesjonell skjermt teknologi, som støtter uanstrengt samarbeid.

- Moderne og slank design – robust, men elegant, noe som gir en diskret integrering i enhver applikasjon og miljø.
- Sikker fjernadministrasjon – kontroller enhetene dine eksternt og sikkert ved å bruke NEC NaviSet Administrator 2; administrere vedlikeholdskrav proaktivt og spare tid og ressurser.
- Uhindret lesbarhet – ingen refleksjoner fra vinduer eller andre lyskilder betyr ingen forstyrrelse av synligheten av skiltinnhold eller møteromspresentasjon.
- Oppdragskritisk 24/7 klar drift – utvalget av industrielle komponenter og nøye design fokusert på krevende bruksscenarier følger med en imponerende og kontinuerlig seeropplevelse.
- Future Ready Connectivity – med flere industristandard digitale og analoge signalinnganger for fleksibel integrering i AV-infrastrukturer.

Spesifikasjoner

Tilbehør

[AVSpecificationAccessories]	[remote-control-transmitter], [installation-set-up-manual], [power-cord], [hdmi-cable], [mounting-bracket], [tabletop-stand], [trolley-stand], [battery]
Shipping Content	[2-x-aaa-batteries], [display], [hdmi-cable], [power-cable], [remote-control], [setup-manual]
[AVSpecificationSpecialCharacteristics]	[dicom-simulation], [hdmi-arc], [powered-usb-port-10-w], [removable-logo]
[AVSpecification247OperationCertified]	True
[AVSpecificationLimitedManufacturersWarrantyYrs]	3
[AVSpecificationBuiltInSpeakersW]	10 + 10
[AVSpecificationPowerManagement]	True
[AVSpecificationEquipmentSpaceMounting]	True
[AVSpecificationCabinetColour]	[black]
[AVSpecificationTempSensor]	True
[AVSpecificationBrightnessSensor]	True
[AVSpecificationSchedulerTimer]	True
[AVSpecificationRemoteManagement]	True
[AVSpecificationPanelTechnology]	IPS with Edge LED backlights
[AVSpecificationNativeResPixels]	3840 x 2160
[AVSpecificationAspectRatio]	16:9
[AVSpecificationBacklightTechnology]	Edge LED
[AVSpecificationBrightnessCdM]	500
[AVSpecificationContrastRatio]	8000:1
[AVSpecificationResponseTimeGreyToGreyAvgMs]	8
[AVSpecificationPixelPitchMm]	0,364
[AVSpecificationViewingAngle]	178
[AVSpecificationColourDepthBn]	1076 (10bit)
[AVSpecificationLandscape]	True
[AVSpecificationPortrait]	True
[AVSpecificationMountingVesaMm]	300 x 300 (FDMI)
[AVSpecificationMountingNumberOfPointsPitch]	4
[AVSpecificationMountingScrewSpecificationSizeMaxLength]M6	
RS232C INN	1
[AVSpecificationLanPort]	1
USB	1
[AVSpecificationScreenSizeInch]	43
[AVSpecificationScreenSizeCm]	108
[AVSpecificationEnergyStar]	True
[AVSpecificationConnectivityOutputAudio35MmJack]1	

AirServer Embedded Screen Mirroring Solution

[AVSpecificationMiracast]	[android-and-windows], [extend-windows-10-desktop], [miracast-over-infrastructure], [screen-mirroring], [touchback-and-pen-support]
Airplay	[code-and-password], [extend-macos-display], [ios], [ipados-and-macos], [screen-mirroring-and-content-sharing]
Google Cast	[android], [chrome-os-and-google-chrome], [prompt-security], [screen-mirroring-and-cast-from-apps-with-drm]
Guest Connectivity	2.4 and 5 GHz channel selection, access control (device only, Internet only or Internet/LAN), Wi-Fi Hotspot, WPA2 security
Video Output	[up-to-full-hd-1920-x-1080-at-60-fps]
No. of Connections	1
Networking	1 x Gigabit LAN, 802.11 ac/b/g/n Wi-Fi, 802.1X security, IPv6 addresses, Proxy
Automatic Updates	[provides-new-features-and-security-enhancements]
[AVSpecificationOperatingVoltageAcv]	100-240
[AVSpecificationFreqHz]	50-60
[AVSpecificationPowerConsumptionWOperatingMax]	80
[AVSpecificationOperatingTempC]	0 - 40
[AVSpecificationStorageTempC]	-20 - 60
[AVSpecificationStorageHumidityMin]	10
[AVSpecificationStorageHumidityMax]	90
[AVSpecificationShippingCartonDimensionsWidthMm]	1120
[AVSpecificationShippingCartonDimensionsHeightMm]	700
[AVSpecificationShippingCartonDimensionsDepthMm]	203
[AVSpecificationProductWeightWithoutStandKg]	18
[AVSpecificationShippingWeightKg]	23
[AVSpecificationConnectivityInputDisplayport]	1
HDMI	2
[AVSpecificationConnectivityInputAudio35MmJack]	1
Rammestørrelse (V/H) mm	11
Rammestørrelse (Ø) mm	11
Rammestørrelse (N) mm	16
Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80
Haze Level [%]	28



Design and specifications are subject to change without prior notice. All information was correct at time of print. Microsoft, Excel, PowerPoint, OneDrive, SharePoint, Active Directory, Windows Server, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the US and/or other countries. Adobe and PostScript 3 are either registered trademarks or trademarks of Adobe Systems Incorporated in the US and/or other countries. Google Drive, Gmail, Android, and Google Cloud Print are trademarks of Google LLC. The Google Drive trademark is used with permission from Google LLC. Box is a trademark, service mark, or registered trademark of Box, Inc. QR Code is a registered trademark of DENSO WAVE INCORPORATED in Japan and other countries. AirPrint and Mac are trademarks of Apple Inc., registered in the US and other countries. PCL is a registered trademark of Hewlett_x0002_Packard Company. Qualcomm DirectOffice is a product of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm is a trademark of Qualcomm Incorporated, registered in the US and other countries. DirectOffice is a trademark of CSR Imaging US, LP, registered in the US and other countries. All other company names, product names and logotypes are trademarks or registered trademarks of their respective owners. ©Sharp Corporation All trademarks acknowledged. E&O. Ref: Sharp/ NEC MultiSync M431 AirServer, 20/5/2026