


[big-pad-interactive-display]

Sharp/ NEC PN-LA652

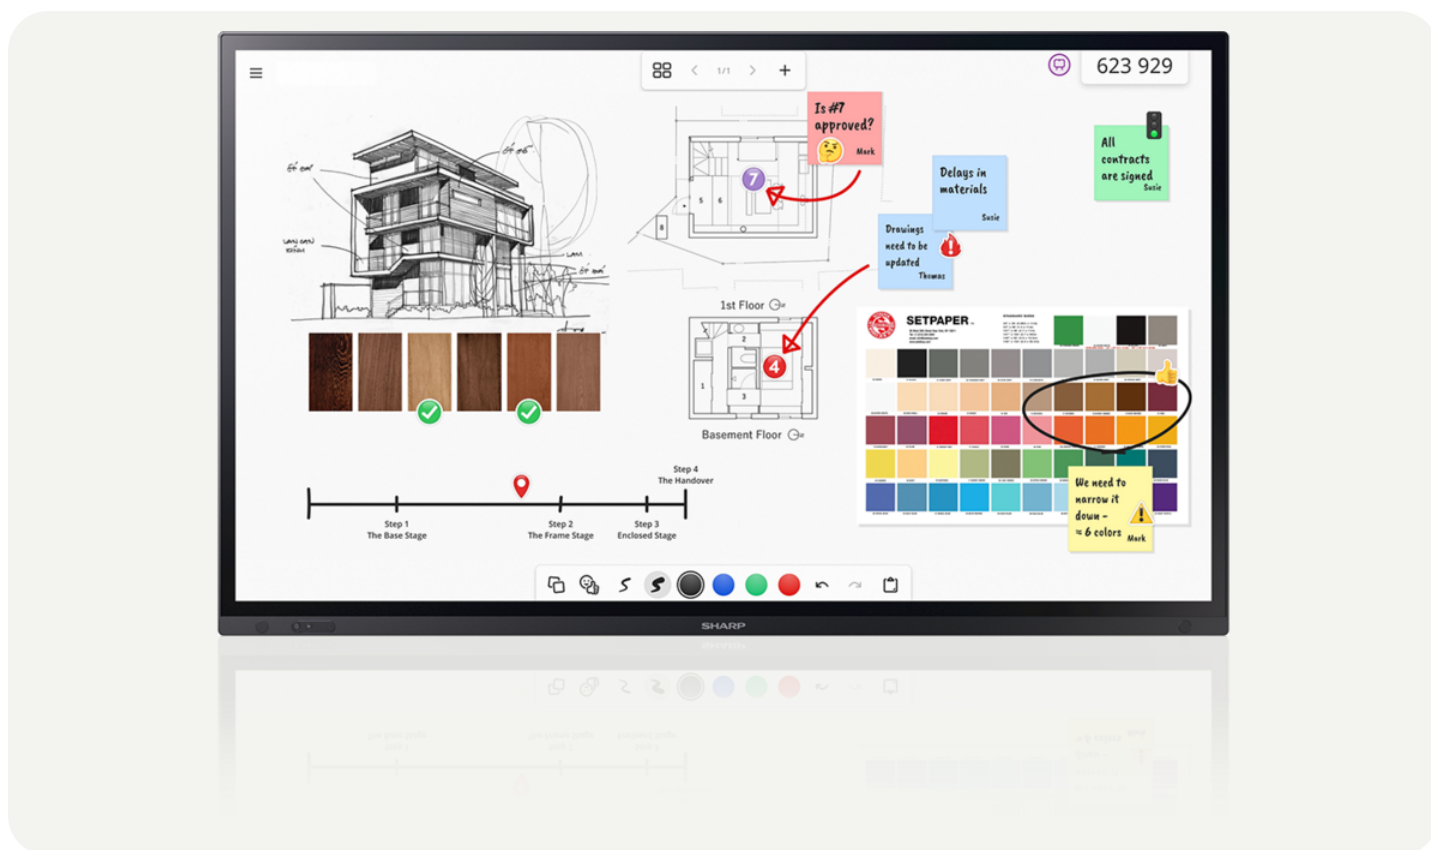

PN-LA-serien integreres elegant og sømløst i eksklusive møterom og styrerom, og opprettholder de høyeste IT-sikkerhetsstandardene samtidig som den tilbyr fleksibilitet og støtter maksimal produktivitet.

- Mest naturlig skriveopplevelse – InGlass™ M5 premium touch-system støtter patentert trykkfølsomhet ved bruk av passive pinner samt Windows Ink og håndflateavvisning.
- Sikker ved design – ikke-Android-plattformen med ekstra sikkerhetsfunksjoner oppfyller de høyeste IT-sikkerhetsstandardene.
- Valgfri Windows-basert Intel SDM slot-in PC – gir ubegrenset allsidighet med kraftig integrert databehandling for rask og enkel tilgang til appene dine som tilbyr et sikkert og låst miljø.
- Energieffektivitet – innebygd funksjonalitet inkludert en omgivelseslyssensor, menneskelig tilstedeværelsesdeteksjon og øko-moduser bidrar til å redusere strømforbruket.

Spesifikasjoner

Tilbehør

[AVSpecificationAccessories]	Fjernkontrollstrømtermitter, Driftsmanual, Strømledning, USB-kabel, Berøringsstift, Batteri, Kabelklemme
Shipping Content	1 x 300 cm USB Cable, 2 x Passive Stylus, 2 x AAA batteries, Blank Sticker, Bracket for Camera, Bracket for Mini PC, Cable Clamps, Display, Power Cable, Remote Control, Setup Manual

[AVSpecificationNumberOfTouchPoints]	20
[AVSpecificationPenModeFingerMode]	Ja
[AVSpecificationScreenHardnessH]	8
[AVSpecificationOperatingSystemCompatibility]	Native Multi-Touch, Windows 7, Windows 8, Windows 10, Linux, Android, Default Mouse, Windows XP, Windows Vista, Mac OSX

Thickness [mm]	3
Touch Method	Finger, Gloves, Stylus (≥ 2 mm)
Data Interface	USB-HID
Accuracy [mm]	1
Palm Rejection	Ja
Windows Ink	Ja
[AVSpecificationTechnology]	InGlass™ M5

[AVSpecificationOperatingVoltageAcv]	100-240
[AVSpecificationFreqHz]	50-60
[AVSpecificationPowerConsumptionWOperatingMax]	190
[AVSpecificationOperatingTempC]	5 to 35
[AVSpecificationStorageHumidityMin]	20
[AVSpecificationStorageHumidityMax]	80

[AVSpecificationConnectivityInputDisplayport]	1
HDMI	2
[AVSpecificationConnectivityInputUsbc]	1

[AVSpecificationConnectivityOutputDisplayport]	1
[AVSpecificationConnectivityOutputAudio35MmJack]	1

RS232C INN	1
[AVSpecificationLanPort]	1
USB	4

Mekanisk

Rammestørrelse (V/H) mm	5
Rammestørrelse (Ø) mm	5
Rammestørrelse (N) mm	32

[AVSpecificationPanelTechnology]	IPS with Direct LED backlights
[AVSpecificationNativeResPixels]	3840 x 2160
[AVSpecificationAspectRatio]	16:9
[AVSpecificationScreenFilter]	AG
[AVSpecificationBacklightTechnology]	LED
[AVSpecificationBrightnessCdM]	450
[AVSpecificationContrastRatio]	1200:1
[AVSpecificationResponseTimeGreyToGreyAvgMs]	8
[AVSpecificationViewingAngle]	178
[AVSpecificationColourDepthBn]	1073 (10bit)

[AVSpecificationSpecialCharacteristics]	Frame Comp, Powered USB Port (10 W), Advanced NTAA
[AVSpecification247OperationCertified]	Ja
[AVSpecificationLimitedManufacturersWarrantyYrs]	3
[AVSpecificationLocalDimming]	Ja
[AVSpecificationBuiltInSpeakersW]	10 + 10
[AVSpecificationCabinetColour]	Black
[AVSpecificationTempSensor]	Ja
[AVSpecificationBrightnessSensor]	Ja
[AVSpecificationPictureInPictureMode]	Ja
[AVSpecificationPictureByPictureMode]	Ja
[AVSpecificationSchedulerTimer]	Ja
[AVSpecificationRemoteManagement]	Ja
[AVSpecificationEMailNotification]	Ja
SNMP	Ja
Operating Time	24/7

[AVSpecificationCeCbReport]	Ja
-----------------------------	----

[AVSpecificationShippingCartonDimensionsWidthMm]	1660
[AVSpecificationShippingCartonDimensionsHeightMm]	1010
[AVSpecificationShippingCartonDimensionsDepthMm]	220
[AVSpecificationProductWeightWithoutStandKg]	49
[AVSpecificationShippingWeightKg]	59

[AVSpecificationLandscape]	Ja
[AVSpecificationPortrait]	Ja
[AVSpecificationHorizontal]	Ja
[AVSpecificationMountingVesaMm]	600 x 400
[AVSpecificationMountingNumberOfPointsPitch]	4
[AVSpecificationMountingScrewSpecificationSizeMaxLength]	M8

[AVSpecificationLightSensorProcessing]	-
--	---

Display

[AVSpecificationScreenSizeInch]	65
[AVSpecificationScreenSizeCm]	164

