


Digital Signage

SHARP/ NEC MULTISYNC M981

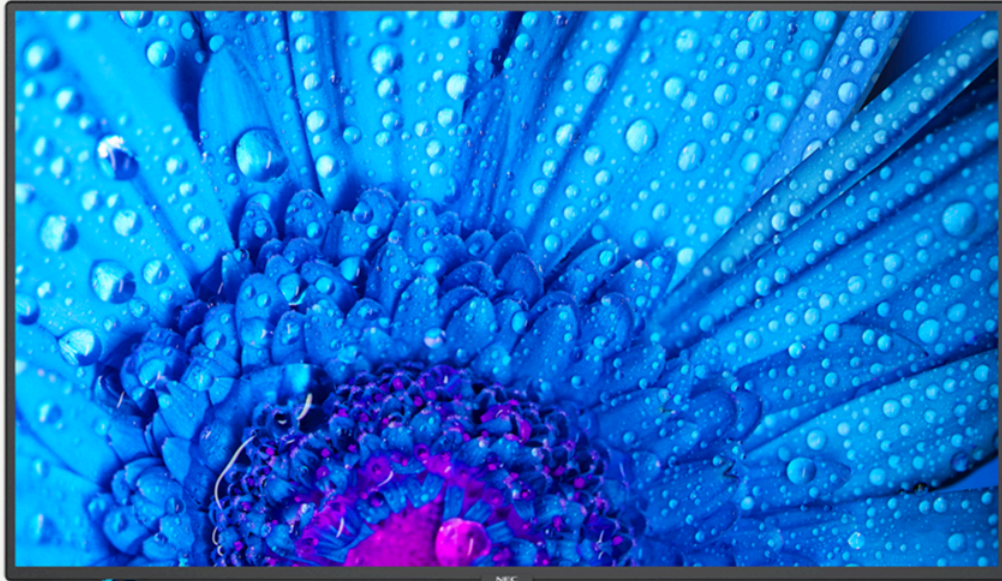

Med slank, moderne stil, 24/7-drift og høy dis-panel, er MultiSync M981 den perfekte passformen for dine reklame-, infotainment- og møteromsbehov.

- Uhindret lesbarhet – ingen refleksjoner fra vinduer eller andre lyskilder betyr ingen forstyrrelse av synligheten av skiltinnhold eller møteromspresentasjon.
- Forbedret bildeytelse – avanserte innstillinger av relevante visuelle parametere gir full kontroll over lysstyrke, farge, gamma og ensartethet via SpectraView Engine for presise, naturlige bilder.
- Oppdragskritisk 24/7 klar drift – utvalget av industrielle komponenter og nøye design fokusert på krevende bruksscenarier følger med en imponerende og kontinuerlig seeropplevelse.
- Future Ready Connectivity – med flere industristandard digitale og analoge signalinnganger for fleksibel integrering i AV-infrastrukturer.
- Sikker fjernadministrasjon – kontroller enhetene dine eksternt og sikkert ved å bruke NEC NaviSet Administrator 2; administrere vedlikeholdskrav proaktivt og spare tid og ressurser.

Spesifikasjoner

Tilbehør

[AVSpecificationAccessories]	[remote-control-transmitter], [installation-set-up-manual], [power-cord], [hdmi-cable], [mounting-bracket], [tabletop-stand], [trolley-stand]
Shipping Content	[2-x-aaa-batteries], [display], [hdmi-cable], [power-cable], [remote-control], [setup-manual]
[AVSpecificationPanelTechnology]	IPS with Direct LED backlights
[AVSpecificationNativeResPixels]	3840 x 2160
[AVSpecificationAspectRatio]	16:9
[AVSpecificationBacklightTechnology]	LED
[AVSpecificationBrightnessCdM]	500
[AVSpecificationContrastRatio]	8000:1
[AVSpecificationResponseTimeGreyToGreyAvgMs]	8
[AVSpecificationViewingAngle]	178
[AVSpecificationColourDepthBn]	1073 (10bit)
[AVSpecificationShippingCartonDimensionsWidthMm]	2350
[AVSpecificationShippingCartonDimensionsHeightMm]	1400
[AVSpecificationShippingCartonDimensionsDepthMm]	310
[AVSpecificationProductWeightWithoutStandKg]	67
[AVSpecificationShippingWeightKg]	99
[AVSpecificationConnectivityInputDisplayport]	3
HDMI	4
[AVSpecificationConnectivityInputAudio35MmJack]	1
RS232C INN	1
[AVSpecificationLanPort]	2
USB	3
[AVSpecificationScreenSizeInch]	98
[AVSpecificationScreenSizeCm]	249
[AVSpecificationEnergyStar]	True
Haze Level [%]	Pro 28

[AVSpecificationSpecialCharacteristics]	[dicom-simulation], [hdmi-arc], [powered-usb-port-10-w], [removable-logo]
[AVSpecification247OperationCertified]	True
[AVSpecificationLimitedManufacturersWarrantyYrs]	3
[AVSpecificationLocalDimming]	True
[AVSpecificationBuiltInSpeakersW]	10 + 10
[AVSpecificationPowerManagement]	True
[AVSpecificationCabinetColour]	[black]
[AVSpecificationTempSensor]	True
[AVSpecificationBrightnessSensor]	True
[AVSpecificationPictureInPictureMode]	True
[AVSpecificationSchedulerTimer]	True
[AVSpecificationRemoteManagement]	True
SNMP	True
[AVSpecificationOperatingVoltageAcv]	100-240
[AVSpecificationFreqHz]	50-60
[AVSpecificationPowerConsumptionWOperatingMax]	340
[AVSpecificationOperatingTempC]	0 - 40
[AVSpecificationStorageTempC]	-20 - 60
[AVSpecificationStorageHumidityMin]	10
[AVSpecificationStorageHumidityMax]	80
[AVSpecificationLandscape]	True
[AVSpecificationPortrait]	True
[AVSpecificationMountingVesaMm]	600 x 400 (FDMI)
[AVSpecificationMountingNumberOfPointsPitch]	4
[AVSpecificationMountingScrewSpecificationSizeMaxLength]M8	
[AVSpecificationConnectivityOutputDisplayport]	1
HDMI	1
[AVSpecificationConnectivityOutputAudio35MmJack]	1
Rammstørrelse (V/H) mm	14
Rammstørrelse (Ø) mm	14
Rammstørrelse (N) mm	15
Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80

