


Digital Signage

# SHARP MULTISYNC® M982 LCD 98" MESSAGE LARGE FORMAT DISPLAY

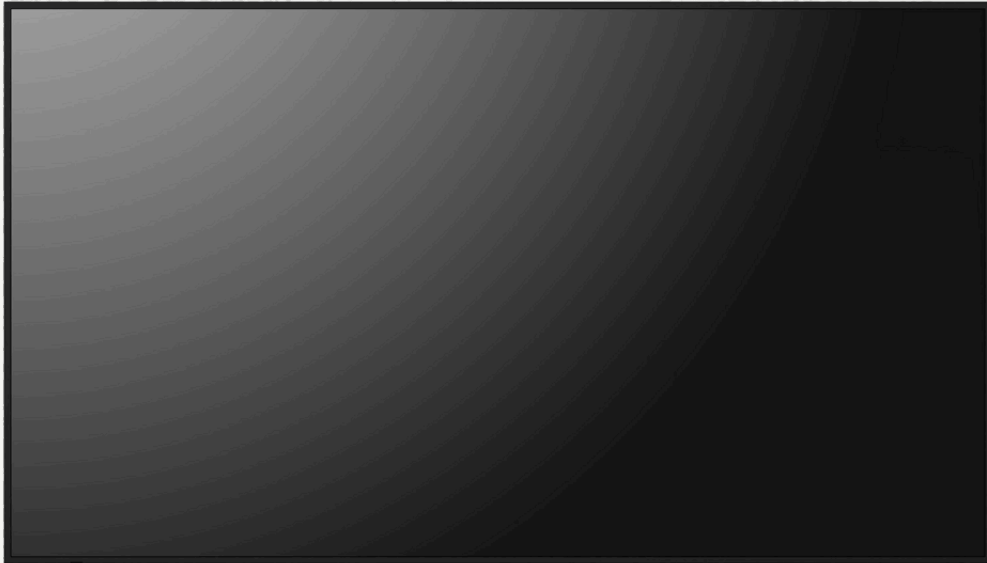

Sharp MultiSync® M2 serien (32"–98") er en fleksibel løsning for profesjonelle displayapplikasjoner og utviklet for å møte behovene i krevende signage og møteromsmiljøer.

- Sømløse møter – én enkelt USBC kabel overfører video, data og strøm for en rask og enkel møtestart uten kabelrot. USBC er standard i moderne møterom og gir en smidig BYOD opplevelse.
- Optimal lesbarhet – et high haze panel reduserer blanding fra vinduer og omgivelseslys, slik at skiltinnhold og presentasjoner er tydelige og lettleste i alle miljøer.
- Sikker nettverkstilkobling – 802.1x støtte over LAN gjør det mulig å koble skjermen trygt og kontrollert til nettverket, noe som gir IT teamet en sikker driftsplattform.
- Forbedret farge og bildepresisjon – når konsekvent farge og bildegjengivelse er viktig, gir NECs SpectraView Engine full kontroll over farger, gamma og enhetlighet for korrekt og konsistent bildegjengivelse.
- Bred AV kompatibilitet – fullt kompatibel med ledende møteromsplattformer som Crestron (XIO Cloud), Cisco Webex, QSys og Microsoft Teams, som sikrer smidig integrasjon og fremtidssikker skalering.

# Spesifikasjoner

[AVSpecificationPanelResponseTimeMs]	8
[AVSpecificationOperatingVoltageAcv]	100-240
[AVSpecificationFreqHz]	50-60
[AVSpecificationViaAcAdapter]	True
[AVSpecificationOperatingVoltageDcv]	100-240
[AVSpecificationOperatingTempC]	0 - 40
[AVSpecificationStorageTempC]	-20 - 60
[AVSpecificationStorageHumidityMin]	10
[AVSpecificationStorageHumidityMax]	80
[AVSpecificationPowerSavingModeW]	[05-eco-standby]
[AVSpecificationBattery]	[128v-38ah-lithium-iron-phosphate]
[AVSpecificationPortraitInstallation]	True
[AVSpecificationLandscapeInstallation]	True
[AVSpecificationLandscape]	True
[AVSpecificationPortrait]	True
[AVSpecificationMountingVesaMm]	600 x 400 (FDMI)
[AVSpecificationMountingNumberOfPointsPitch]	4
[AVSpecificationMountingScrewSpecificationSizeMaxLength]M8	
[AVSpecificationFaceUp]	True
[AVSpecificationPanelTechnology]	IPS with Direct LED backlights
[AVSpecificationNativeResPixels]	3840 x 2160
[AVSpecificationAspectRatio]	16:9
[AVSpecificationBrightnessCdM]	550
[AVSpecificationContrastRatio]	8000:1
[AVSpecificationViewingAngle]	178
[AVSpecificationColourDepthBn]	1073 (10bit)
Response Time (typ.) [ms]	8
[AVSpecificationShippingCartonDimensionsWidthMm]	2350
[AVSpecificationShippingCartonDimensionsHeightMm]	1400
[AVSpecificationShippingCartonDimensionsDepthMm]	310
[AVSpecificationShippingWeightKg]	99
[AVSpecificationScreenSizeInch]	98
[AVSpecificationScreenSizeCm]	247
Colour Gamuts	72% NTSC
Rammestørrelse (V/H) mm	16
Rammestørrelse (Ø) mm	16
Rammestørrelse (N) mm	16
Energy Efficiency	LED backlight technology, Energy efficiency class: G
Ecological Standards	[energy-star-80]
Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80
Power Supply	100-240 V

[AVSpecificationSpecialCharacteristics]	[audio-settings-with-equalizer], [automatic-alarm-e-mails], [clone-settings], [snmp-support], [retail-picture-mode]
[AVSpecification247OperationCertified]	True
[AVSpecificationBuiltInSpeakersW]	10 + 10
[AVSpecificationPowerManagement]	True
[AVSpecificationTempSensor]	True
[AVSpecificationBrightnessSensor]	True
[AVSpecificationRemoteManagement]	True
Operating Time	24/7
[AVSpecificationColourVersions]	[black-back-cabinet], [black-front-bezel]
Safety & Ergonomics	EMC Class B, UKCA, ISO 9241-307 (pixel failure class I), RoHS, UL/C-UL or CSA, FCC Class B, CE, EnergyStar 8.0, REACH
[AVSpecificationWarranty]	[optional-4th-to-5th-year-warranty-extension], [additional-services-available], [3-years-warranty-incl-backlight]
<b>Tilbehør</b>	
[AVSpecificationAccessories]	[eco-sensor], [feet], [wall-mount], [usb-c-cable], [trolley], [speaker], [remote-control-kit]
Shipping Content	[power-cable], [remote-control], [hdmi-cable], [2-x-aaa-batteries], [setup-manual], [display]
Supported Resolution	1024 x 768 , 1920 x 1200, 1400 x 1050, 1366 x 768, 720 x 480, 720 x 400, 720 x 576, 1360 x 768, 3840 x 2160, 4096 x 2160, 1680 x 1050, 1280 x 720, 800 x 600, 640 x 480, 1920 x 1080, 1600 x 1200, 1280 x 1024, 1440 x 900, 1280 x 800
Digital	DisplayPort, DisplayPort out, HDMI, USB Type C
Output Control	LAN 100Mbit
[AVSpecificationLandscapeDimensionsWidthMm]	2195
[AVSpecificationLandscapeDimensionsHeightMm]	1250
[AVSpecificationLandscapeDimensionsDepthMm]	84
Horizontal Frequency [kHz]	15 - 135
Vertical Frequency [Hz]	23 - 76
Haze Level [%]	Pro 25
[AVSpecificationWeightKg]	68

