


Digital Signage

PN-HS551

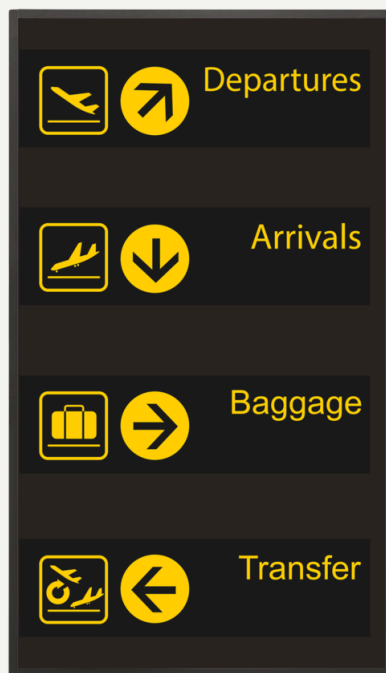

Den nye profesjonelle PN-HS431 UHD digital skilting i stort format som lett kan brukes til transport, detaljhandel og bedriftsapplikasjoner. 700 cd/m² er bra for lyse miljøer, og skjermen kan kjøre døgnet rundt 24/7.

- Gjør inntrykk med 55 -skjermen i detaljhandel-, bedrifts- eller transportmiljøer
- Vis bilder og video i detalj med 4K Ultra HD-oppløsning (3840 x 2160 piksler)
- Forbedret og sann representasjon av farger vist fra et bredt fargespekter
- Kontinuerlig visning av innhold i åpningstidene 24/7
- Vis og hør innhold enkelt med integrert 4K USB-mediespiller og høyttalere
- Siste HDMI-tilkobling for 4K ved 60Hz
- 50.000 timers levetid for bakgrunnsbelysning (portrett/landskap 25°C)
- Fleksibel installasjon i stående, liggende og forsiden opp/ned (360°)

Spesifikasjoner

Tilbehør

[AVSpecificationAccessories]	[remote-control-transmitter], [operation-manual], [installation-set-up-manual], [cd-rom], [power-cord], [battery], [cable-clamp], [portrait-mount-sticker-kit]
[AVSpecificationPanelTechnology]	TFT-LCD
[AVSpecificationNativeResPixels]	3840 x 2160
[AVSpecificationAspectRatio]	16:9
[AVSpecificationBacklightTechnology]	W-LED / Full Array
[AVSpecificationBrightnessCdM]	700
[AVSpecificationContrastRatio]	5000:1
[AVSpecificationDisplayColoursMillions]	1060
[AVSpecificationResponseTimeGreyToGreyAvgMs]	8
[AVSpecificationPixelPitchMm]	0,315
[AVSpecificationViewingAngle]	178
[AVSpecificationActiveScreenAreaHVMm]	1209 x 680
[AVSpecificationOperatingVoltageAcv]	100-240
[AVSpecificationFreqHz]	50-60
[AVSpecificationOperatingVoltageDcv]	190
[AVSpecificationPowerConsumptionWStandby]	50
[AVSpecificationOperatingTempC]	0 - 40
HDMI	3
[AVSpecificationConnectivityInputAudio35MmJack]	1
VGA	1
Rammstørrelse (V/H) mm	14
Rammestørrelse (Ø) mm	14
Rammestørrelse (N) mm	14
Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80
[AVSpecificationProductWeightWithoutStandKg]	18

[AVSpecification247OperationCertified]	True
[AVSpecificationBuiltInSpeakersW]	10 + 10
[AVSpecificationComputerInputPlugAndPlay]	True
[AVSpecificationPowerManagement]	True
[AVSpecificationCabinetColour]	[black]
[AVSpecificationFanless]	True
[AVSpecificationTempSensor]	True
[AVSpecificationResidualImageReductionFeature]	True
[AVSpecificationMultiScreenFunctionVideowallModeEnlargeFeature]	True
[AVSpecificationMultiLanguageOsd]	True
[AVSpecificationSchedulerTimer]	True
[AVSpecificationRemoteManagement]	True
[AVSpecificationAdjustmentLockFeature]	True
[AVSpecificationDisplayingUseTimeFeature]	True
[AVSpecificationScreenAdjustment]	True
[AVSpecificationColourTempAdjustment]	True
[AVSpecificationGammaAdjustment]	True
[AVSpecificationSelfAdjust]	True
[AVSpecificationHardwareDiagnosis]	True
[AVSpecificationMonitorControlSoftwareSupport]	True
[AVSpecificationTempControl]	True

[AVSpecificationLandscape]	True
[AVSpecificationPortrait]	True
[AVSpecificationHorizontal]	True
[AVSpecificationMountingVesaMm]	400 x 400
[AVSpecificationMountingScrewSpecificationSizeMaxLength]M6	

RS232C INN	1
[AVSpecificationLanPort]	1
USB	1

[AVSpecificationScreenSizeInch]	55
[AVSpecificationScreenSizeCm]	138

[AVSpecificationConnectivityOutputAudioRcaRL]	1
---	---

[AVSpecificationCeCbReport]	True
-----------------------------	------

Haze Level [%]	25
----------------	----

