


Digital Signage

SHARP/ NEC MULTISYNC M321

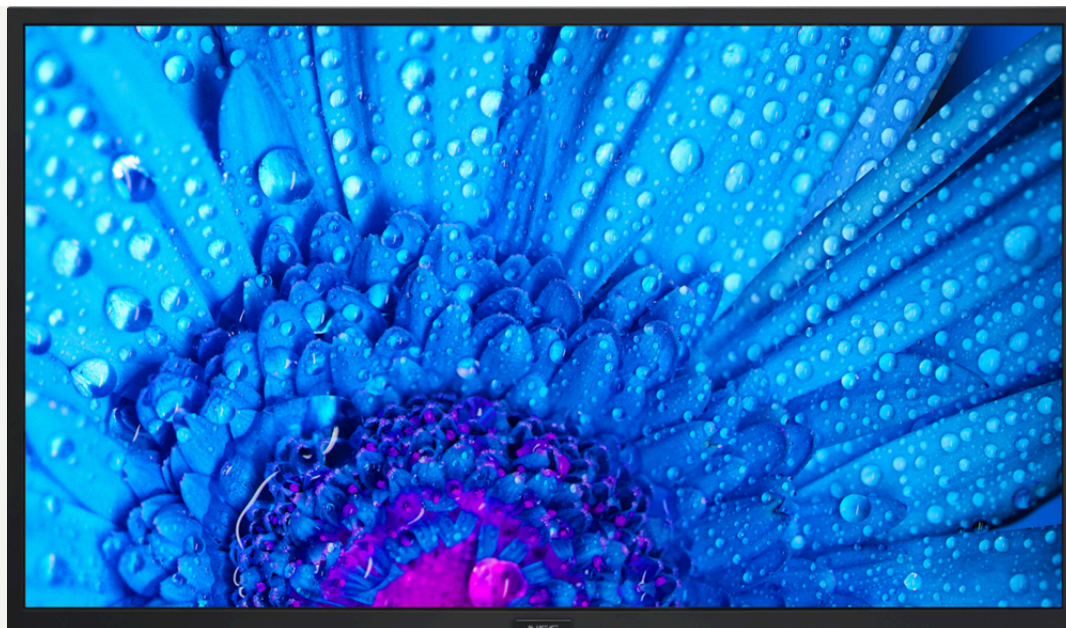

Intuitiv, profesjonell innholdsleverandør.

- Moderne og slank design – den robuste, men samtidig elegante skjermen passer godt inn i alle bruksområder og omgivelser.
- Sikker fjernstyring – styr enhetene dine eksternt og sikkert med NEC NaviSet Administrator 2, og administrer vedlikeholdsbehov proaktivt for å spare tid og ressurser.
- Uhindret lesbarhet – ingen reflekser fra vinduer eller andre lyskilder betyr at ingenting forstyrrer synligheten for innholdet på skilt eller i møteromspresentasjoner.
- Klar for virksomhetskritisk 24/7 drift – komponenter av industriell kvalitet og gjennomarbeidet design med fokus på krevende brukssituasjoner kombinert med en imponerende og kontinuerlig seeropplevelse
- Fremtidsrettet tilkoblingsfunksjonalitet – digitale og analoge signalinnganger for en rekke bransjestandarder som gir fleksibel integrering i eksisterende AV-infrastrukturer.

Spesifikasjoner

Tilbehør

[AVSpecificationAccessories]	[remote-control-transmitter], [installation-set-up-manual], [power-cord], [hdmi-cable], [mounting-bracket], [tabletop-stand]
Shipping Content	[2-x-aaa-batteries], [display], [hdmi-cable], [power-cable], [remote-control], [setup-manual]
[AVSpecificationPanelTechnology]	IPS with Direct LED backlights
[AVSpecificationNativeResPixels]	1920 x 1080
[AVSpecificationAspectRatio]	16:9
[AVSpecificationBrightnessCdM]	450
[AVSpecificationContrastRatio]	1100:1
[AVSpecificationResponseTimeGreyToGreyAvgMs]	8
[AVSpecificationViewingAngle]	178
[AVSpecificationColourDepthBn]	16.7 (8bit)
[AVSpecificationLandscape]	True
[AVSpecificationPortrait]	True
[AVSpecificationHorizontal]	True
[AVSpecificationMountingVesaMm]	100 x 100 (FDMI), 200 x 200 (FDMI)
[AVSpecificationMountingNumberOfPointsPitch]	4
[AVSpecificationMountingScrewSpecificationSizeMaxLength]M4	
Rammstørrelse (V/H) mm	12
Rammstørrelse (Ø) mm	12
Rammstørrelse (N) mm	17
RS232C INN	1
USB	1
Operating Humidity (min) [%]	20
Operating Humidity (max) [%]	80
[AVSpecificationConnectivityOutputAudio35MmJack]1	

[AVSpecificationSpecialCharacteristics]	[hdmi-arc], [powered-usb-port-10-w], [removable-logo]
[AVSpecification247OperationCertified]	True
[AVSpecificationLimitedManufacturersWarrantyYrs]	3
[AVSpecificationBuiltInSpeakersW]	5 + 5
[AVSpecificationPowerManagement]	True
[AVSpecificationEquipmentSpaceMounting]	True
[AVSpecificationTempSensor]	True
[AVSpecificationBrightnessSensor]	True
[AVSpecificationSchedulerTimer]	True
[AVSpecificationRemoteManagement]	True
[AVSpecificationOperatingVoltageAcv]	100-240
[AVSpecificationFreqHz]	50-60
[AVSpecificationPowerConsumptionWOperatingMax]	40
[AVSpecificationOperatingTempC]	0 - 40
[AVSpecificationStorageTempC]	-20 - 60
[AVSpecificationStorageHumidityMin]	10
[AVSpecificationStorageHumidityMax]	90
[AVSpecificationShippingCartonDimensionsWidthMm]	870
[AVSpecificationShippingCartonDimensionsHeightMm]	527
[AVSpecificationShippingCartonDimensionsDepthMm]	160
[AVSpecificationProductWeightWithoutStandKg]	6
[AVSpecificationShippingWeightKg]	10
[AVSpecificationConnectivityInputDisplayport]	2
HDMI	4
[AVSpecificationConnectivityInputAudio35MmJack]	1
VGA	1
[AVSpecificationScreenSizeInch]	32
[AVSpecificationScreenSizeCm]	80
[AVSpecificationEnergyStar]	True
Haze Level [%]	Pro 28

